

# GRAS 40HL

1/2" LEMO Low-noise Microphone System



Freq range: 10 Hz to 16 kHz  
Dyn range: 6.5 dB(A) to 110 dB  
Sensitivity: 850 mV/Pa

The GRAS 40HL 1/2" Low-noise Microphone System measures sound pressure levels down close to the threshold of human hearing. It is thus generally suitable for sound-power measurements on even very quiet products. Its very wide dynamic range permits measurements down to 6.5 dB re. 20 Pa (in 1/3-octave bands) from 20 Hz to 20 kHz.

## Typical applications and use

- Measurements at very low sound pressure levels
- Measurements on hard-disk drives, computer products, anechoic rooms, quiet rooms, etc
- Sound-power measurements at low levels

Ordering info.

## Design

The 40HL comprises a special high-sensitive 1/2" free-field measurement microphone and an integrated 1/2" low-noise preamplifier. In combination, they connect to most high-quality input modules with LEMO 1B connector.

It complies with IEC 61672 class 1.

## Preamplifier

The preamplifier, a true 1/2" low-noise amplifier with LEMO 1B connector, has a built-in compensation filter for free-field microphones.

## Microphone

The 1/2" microphone is an externally-polarized free field microphone with a specially reduced inherent noise floor in order to achieve a high dynamic range and wide frequency range. Its diaphragm is specially tuned to yield high sensitivity coupled with low internal noise.


## TEDS

The preamplifier of the 40HL has TEDS according to IEEE 1451.4. If your measurement platform supports TEDS you can read and write data like properties and calibration data.


## Operating 40HL

For holding the microphone, you can order tripods and for level calibration of you need a pistonphone and Calibration Adapter attenuating the pistonphone signal to 94 dB re. 20  $\mu$ Pa. See the tab

Frequency range ( $\pm 1$ dB)	Hz	12.5 to 10k
Frequency range ( $\pm 2$ dB)	Hz	10 to 16 k
Frequency range ( $\pm 3$ dB)	Hz	6 to 20k
Dynamic range lower limit (microphone thermal noise)	dB(A)	6.5
Dynamic range upper limit	dB	110
Set sensitivity @ 250 Hz ( $\pm 2$ dB)	mV/Pa	850
Polarization voltage	V	200 V / Traditional
POWER SUPPLY		+/- 15V to +/- 60V or 30 - 120V
Power consumption	mA	max. 5.5 mA
Microphone venting		Rear
Output impedance	$\Omega$	47
Temperature range, operation	$^{\circ}\text{C} / ^{\circ}\text{F}$	-20 to 60 / -4 to 140
Temperature range, storage	$^{\circ}\text{C} / ^{\circ}\text{F}$	-40 to 85 / -40 to 185
Temperature coefficient @250 Hz	dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$	-0,007 / -0,004
Static pressure coefficient @250 Hz	dB/kPa	-0.01
Humidity range non condensing	% RH	0 to 95
Humidity coefficient @250 Hz	dB/% RH	0,001
Influence of axial vibration @1 m/s <sup>2</sup>	dB re 20 $\mu\text{Pa}$	63
TEDS (IEEE 1451.4)		27 v. 1.0
Connector type		7-pin LEMO (FGG.1B.307)
CE/RoHS compliant/WEEE registered		Yes / Yes / Yes

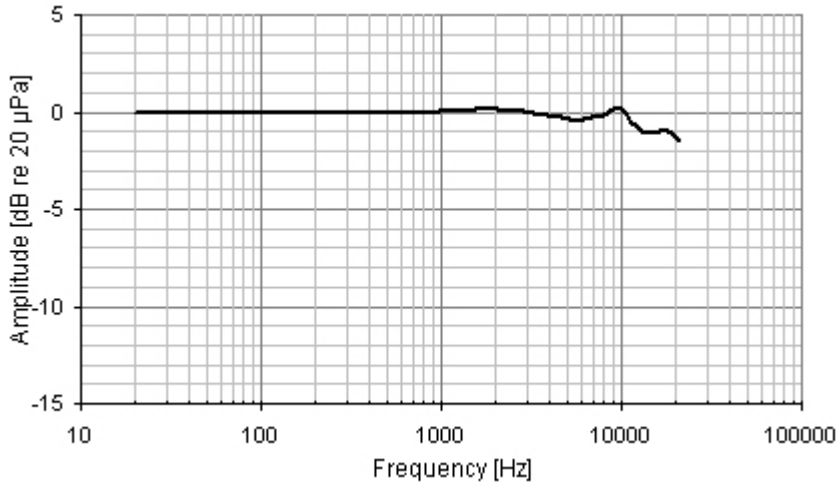

Typical frequency response

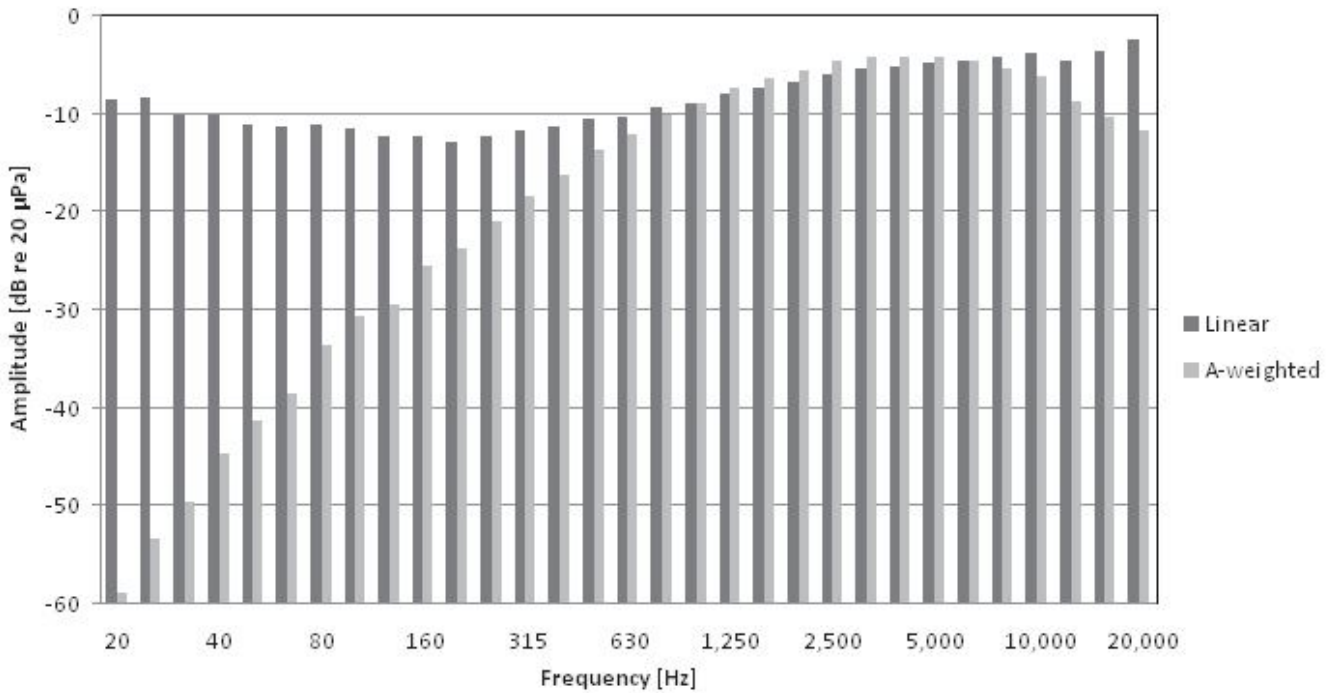

Typical noise floor shown in 1/3-octave bands - linear and A-weighted

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

## Optional items

<a href="#">GRAS AA0008</a>	3 m LEMO-to-LEMO cable*
<a href="#">GRAS AA0009</a>	10 m LEMO-to-LEMO cable*
<a href="#">GRAS 12AD</a>	1-Channel Power Module
<a href="#">GRAS 12AR</a>	2-Channel Power Module
<a href="#">GRAS 12AA</a>	2-Channel LEMO Power Module with gain, filters and Syscheck generator
<a href="#">GRAS 12AK</a>	1-Channel Power Module with gain, filters and SysCheck generator
<a href="#">GRAS 12AQ</a>	2-Channel Universal Power Module with signal conditioning and PC interface
<a href="#">GRAS AL0006</a>	Tripod
<a href="#">GRAS RA0093</a>	Adjustable, high quality, stainless steel tripod adapter
<a href="#">GRAS AM0069</a>	Windscreen for 1/2" Microphones
<a href="#">GRAS 42AP</a>	Intelligent Pistonphone, Class 0
<a href="#">GRAS 42AA</a>	Pistonphone, Class 1
<a href="#">GRAS RA0090</a>	94 dB Pistonphone Coupler

\*The cables also function as connection cables (to connect 40HL to a power module).

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

# GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

**HEAD OFFICE, DENMARK**  
**GRAS SOUND & VIBRATION**  
Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[gras@grasacoustics.com](mailto:gras@grasacoustics.com)

**USA**  
**GRAS SOUND & VIBRATION**  
9290 SW Nimbus Avenue  
Beaverton, OR 97008  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-usa@grasacoustics.com](mailto:sales-usa@grasacoustics.com)

**UK**  
**GRAS SOUND & VIBRATION**  
Unit 115, Gibson House,  
Ermine Business Park, Huntingdon,  
Cambridgeshire, PE29 6XU  
Tel: +44 (0) 7762 584 202  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-uk@grasacoustics.com](mailto:sales-uk@grasacoustics.com)

**CHINA**  
**GRAS SOUND & VIBRATION**  
Room 315, RuiBo Center(T1)  
Lane683, Shenhong Rd,  
Minhang District,  
Shanghai, China, 201107  
Tel: +86 21 64203370  
[www.GRASacoustics.cn](http://www.GRASacoustics.cn)  
[cnsales@grasacoustics.com](mailto:cnsales@grasacoustics.com)



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at [www.grasacoustics.com](http://www.grasacoustics.com)

[grasacoustics.com](http://grasacoustics.com)

**GRAS**  
An Axiometrix Solutions Brand