GRAS 43AC-S4

High-Frequency Ear Simulator Kit LEMO





Freq range: 3.15 Hz to 20 kHz Dyn range: 25 dB(A) to 138 dB Sensitivity: 50 mV/Pa

Use: For general acoustic diagnostics

The GRAS 43AC-S4 Ear Simulator Kit is a complete test-jig for high-frequency acoustical measurements up to 20 kHz on earphones coupled to the ear by inserts such as tubes and ear moulds.



Technology

The GRAS 43AC-S4 Ear Simulator Kit is a complete test jig for acoustically testing earphones coupled to the ear via inserts such as tubes and ear moulds and complies with the following international requirements:

 IEC 60318-4: Occluded-ear simulator for the measurement of earphones coupled to the ear by ear inserts.

43AC-S4 uses the RA0401 High-Frequency Ear Simulator which extends the useful frequency range to 20 kHz. Read more abot the RA0401 here.

The 43AC comprises:

- <u>GRAS RA0401</u> Externally Polarized High-Frequency Ear Simulator
- GRAS 40AG 1/2" Pressure Microphone (included in RA0401)
- GRAS 26AC 1/4" Preamplifier
- GRAS RA0001 Right-angled Adapter
- GRAS RA0052 Test Jig

The Test Jig has an adjustable spring-loaded arm to exert a variable force on the test object.

A prepolarized version is available, GRAS 43AC-S5.




Specifications

| Theoretical dynamic range lower limit with GRAS preamplifier | dB(A) | 25 |
|--|---------------|------------------------|
| Theoretical dynamic range upper limit with GRAS preamplifier @ +28 V / ±14 V power supply | dB | 153 |
| Theoretical dynamic range upper limit with GRAS preamplifier @ +120 V / ±60 V power supply | dB | 164 |
| Set sensitivity @ 250 Hz (±2 dB) | mV/Pa | 12 |
| Set sensitivity @ 250 Hz (±2 dB) | dB re 1V/Pa | -38.5 |
| Coupler volume | mm³ | 1260 @ 500 Hz |
| Resonance frequency | kHz | 13.5 |
| Temperature range, operation | °C / °F | -30 to 60 / -22 to 140 |
| Temperature coefficient @250 Hz | dB/°C / dB/°F | -0.01 / -0.006 |
| Humidity range non condensing | % RH | 0 to 75 |
| ANSI standard | | S3.7 |
| IEC standard | | 60318-4 (former 60711) |
| CE/RoHS compliant/WEEE registered | | Yes/Yes/Yes |
| Connector type | | 3 m 7-pin LEMO |
| Weight | g / oz | 1550 / 54.675 |



Specifications

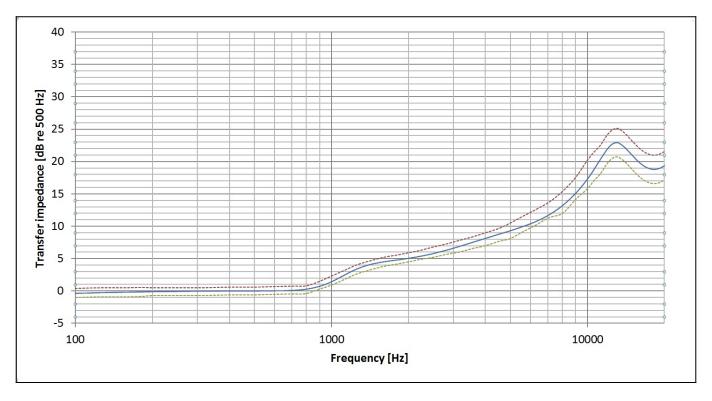

Typical frequency response for RA0401



Ordering Info

Included

| GRAS RA0401 | High-Frequency Ear Simulator, including 40AG microphone (ext. polarized) |
|--------------------|--|
| GRAS 26AC | ¼" Preamplifier |
| GRAS RA0001 | Right Angled Adapter |
| | |
| <u>GRAS RA0052</u> | Test Jig |
| GRAS GR0435 | In-ear Adapter |
| GRAS GR0436 | Tube stud |
| GRAS GR0437 | Ear-mould Simulator |
| GRAS GR0438 | Union nut |
| GRAS GR0440 | Tube stud |
| GRAS GR0433 | Calibration Adapter |
| GRAS GR0434 | Stop Washer |
| GRAS MI0070 | Cord 0.2 m |

Optional

| GRAS 12AK | Power Module |
|-----------|--------------|
| GRAS 42AA | Pistonphone |

Miscellaneous

| GRAS RA0196 | High-tension springs (set of two) |
|-------------|-----------------------------------|

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.



GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK

GRAS SOUND & VIBRATION

Skovlytoften 33 2840 Holte Denmark Tel: +45 4566 4046 www.GRASacoustics.com gras@grasacoustics.com

USA

GRAS SOUND & VIBRATION

9290 SW Nimbus Avenue Beaverton, OR 97008 Tel: 503-627-0832 Toll Free: 800-231-7350 www.GRASacoustics.com sales-usa@grasacoustics.com

uк

GRAS SOUND & VIBRATION

Unit 115, Gibson House, Ermine Business Park, Huntingdon, Cambridgeshire, PE29 6XU Tel: +44 (0) 7762 584 202 www.GRASacoustics.com sales-uk@grasacoustics.com

ANIHO

GRAS SOUND & VIBRATION

Room 315, RuiBo Center(T1) Lane683, Shenhong Rd, Minhang District, Shanghai, China, 201107 Tel: +86 21 64203370 www.GRASacoustics.cn cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

GRAS