

# GRAS 40AC

1/2" Ext. Polarized Free-field Microphone, Wide Frequency



Freq range: 3.15 Hz to 40 kHz  
Dyn range: 20 dBA to 164 dB  
Sensitivity: 12.5 mV/Pa

The 40AC is an IEC 61094 WS2F classified 1/2" externally polarized free-field, wide-frequency microphone with rear-venting. The prepolarized equivalent is GRAS 40AM.

## Introduction

GRAS 40AC is a high-precision condenser microphone made according to IEC 61094-4 requirements. The 40AC's design is based on the original reference 1/2" pressure microphone, but optimized for free-field measurements. This results in a doubling of the upper 3 dB frequency limit. All other parameters remain unchanged, making 40AC the perfect free-field complement to the original [GRAS 40AG 1/2" Ext. Polarized Pressure Microphone](#).

The 40AC is individually factory-calibrated and delivered with a calibration chart stating its specific open-circuit sensitivity, pressure, and corrected free-field frequency responses.

## Typical applications and use

The compact design and low sensitivity make 40AC extremely robust and stable. This, combined with its wide frequency range, makes it an all-round free-field microphone suitable for both field-work and precision laboratory measurements. It is also ideal as a working standard microphone in calibration laboratories that offer free-field calibration.

## Compatibility

40AC requires a standardized 1/2" or 1/4" Lemo compatible preamplifier and an input module with a 7-pin Lemo connector that provides polarization and supply voltages for microphone and preamplifier.

## System verification

For daily verification and check of your measurement setup, we recommend using a calibrator like [GRAS 42AG](#) Sound Calibrator, Class 1.

For proper sensitivity calibration, we recommend using a pistonphone like [GRAS 42AP](#) Intelligent Pistonphone, Class 0.

## Calibration

When leaving the factory, all GRAS microphones have been calibrated in a controlled laboratory environment using traceable calibration equipment. Depending on the use, measurement environment and internal quality control programs we recommend that the microphone is recalibrated at least once a year.

We offer two kinds of calibration as an optional after-sales service: GRAS Traceable Calibration and GRAS Accredited Calibration.

GRAS Traceable Calibration is a traceable calibration performed by trained personnel under controlled conditions according to established procedures and standards. This is identical to the rigorous calibration that all GRAS microphones are subjected to as an integral part of our quality assurance.

GRAS Accredited Calibration is performed by the GRAS Accredited Calibration Laboratory that has been accredited in accordance with ISO 17025 by DANAK, the Danish Accreditation Fund.

If you want a new microphone set delivered with an accredited calibration in stead of the default factory calibration, specify this when ordering.

Learn more at [gras/calib](https://gras.com/calib).

## Quality and warranty

All GRAS microphones are made of high-quality materials that will ensure life-long stability and robustness. The microphones are all assembled in verified clean-room environments by skilled and dedicated operators with many years of expertise in this field.

The microphone diaphragm, body, and improved protection grid are made of high-grade stainless steel, which makes the microphone resistant to


physical damage, as well as corrosion caused by aggressive air or gasses.

This, combined with the reinforced gold-plated microphone terminal which guarantees a highly reliable connection, enables GRAS to offer 5 years warranty against defective materials and workmanship.


## Service

If you accidentally damage the diaphragm on a GRAS microphone, we can – in most cases – replace it at a very reasonable cost and with a short turn-around time. This not only protects your investment, but also pleases your quality assurance department because you don't have to worry about new serial numbers, etc.

|   |                   |                         |
|---|-------------------|-------------------------|
| Polarization/Connection   |                   | 200 V / Traditional     |
| Frequency range ( $\pm 1$ dB)   | Hz                | 5 to 16 k               |
| Frequency range ( $\pm 2$ dB)   | Hz                | 3.15 to 40 k            |
| Dynamic range lower limit (microphone thermal noise)                                | dB(A)             | 20                      |
| Dynamic range lower limit with GRAS preamplifier                                    | dB(A)             | 25                      |
| Dynamic range upper limit   | dB                | 164                     |
| Dynamic range upper limit with GRAS preamplifier @ +28 V / $\pm 14$ V power supply  | dB                | 153                     |
| Dynamic range upper limit with GRAS preamplifier @ +120 V / $\pm 60$ V power supply | dB                | 164                     |
| Open-circuit sensitivity @ 250 Hz ( $\pm 2$ dB)                                     | mV/Pa             | 12.5                    |
| Open-circuit sensitivity @ 250 Hz ( $\pm 2$ dB)                                     | dB re 1V/Pa       | -38                     |
| Resonance frequency   | kHz               | 32                      |
| Microphone cartridge capacitance, typ.  | pF                | 18                      |
| Microphone venting  |                   | Rear                    |
| Temperature range, operation  | °C / °F           | -40 to 150 / -40 to 302 |
| IEC 61094-4 Designation   |                   | WS2F                    |
| Temperature range, storage  | °C / °F           | -40 to 85 / -40 to 185  |
| Humidity range non condensing   | % RH              | 0 to 90                 |
| Temperature coefficient @250 Hz   | dB/°C / dB/°F     | -0.01 / -0.006          |
| Humidity coefficient @250 Hz  | dB/% RH           | -0.001                  |
| Static pressure coefficient @250 Hz   | dB/kPa            | -0.01                   |
| Influence of axial vibration @1 m/s <sup>2</sup>                                    | dB re 20 $\mu$ Pa | 60                      |
| CE/RoHS compliant/WEEE registered   |                   | Yes / Yes, Yes          |
| Weight  | g / oz            | 6.25 / 0.22             |

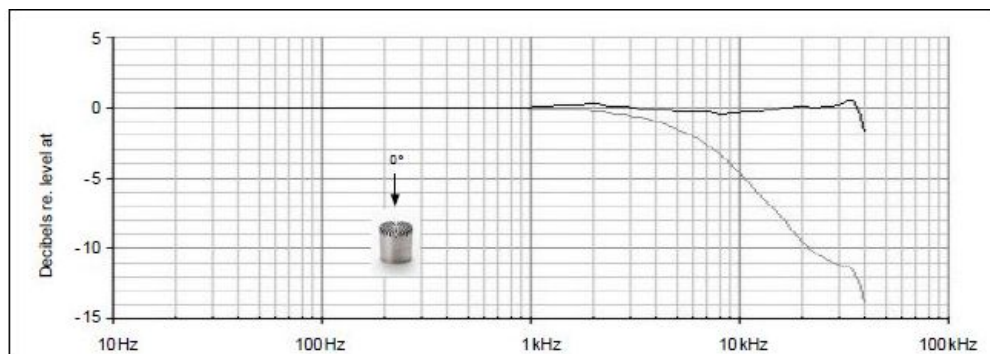



Typical frequency response. Upper curve shows free-field response for 0°, lower curve shows pressure response

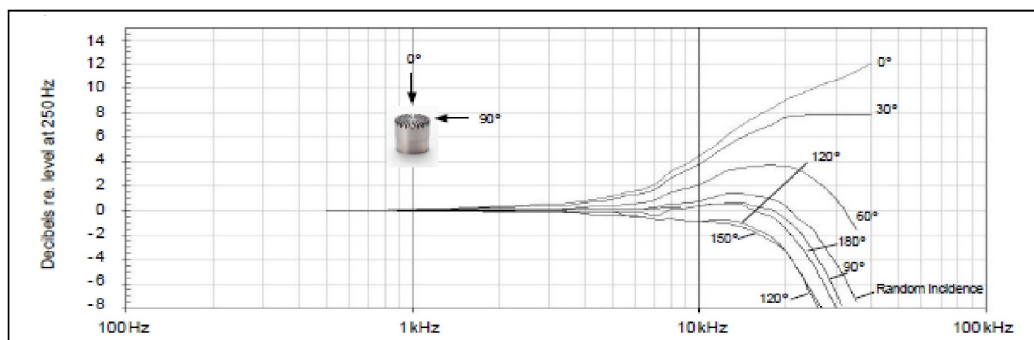

Free-field corrections for various degrees of incidence

GRAS Sound & Vibration reserves the right to change specifications without notice.

Dimensions in mm

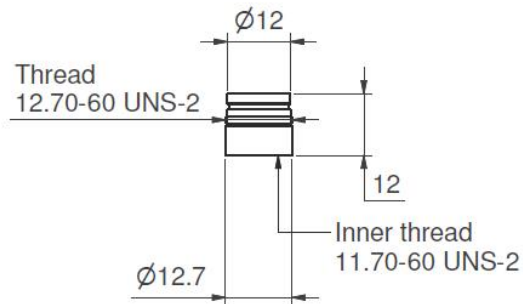

Optional items

|                             |  |
|-----------------------------|--|
| <a href="#">GRAS AF0008</a> | Adapter for 1/4" preamplifier and 1/2" microphone                    |
| <a href="#">GRAS GR0010</a> | Adapter for 1/4" preamplifier and 1/2" microphone                    |
| <a href="#">GRAS RA0001</a> | Right-angled (90°) adapter for 1/2" microphone and 1/4" preamplifier |
| <a href="#">GRAS RA0003</a> | Adapter for 1/4" preamplifier and 1/2" microphone                    |
| <a href="#">GRAS RA0016</a> | 20 dB Attenuator for externally polarized 1/2" microphones           |
| GRAS CA0001                 | Traceable Calibration of Microphone                                  |
| GRAS CA2001                 | Accredited Calibration of Microphone                                 |

GRAS Sound & Vibration reserves the right to change accessories without notice.

# GRAS Worldwide

Subsidiaries and distributors in more  
than 40 countries

## HEAD OFFICE, DENMARK

### GRAS SOUND & VIBRATION

Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[gras@grasacoustics.com](mailto:gras@grasacoustics.com)

## USA

### GRAS SOUND & VIBRATION

9290 SW Nimbus Avenue  
Beaverton, OR 97008  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-usa@grasacoustics.com](mailto:sales-usa@grasacoustics.com)

## UK

### GRAS SOUND & VIBRATION

Unit 115, Gibson House,  
Ermine Business Park, Huntingdon,  
Cambridgeshire, PE29 6XU  
Tel: +44 (0) 7762 584 202  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-uk@grasacoustics.com](mailto:sales-uk@grasacoustics.com)

## CHINA

### GRAS SOUND & VIBRATION

Room 315, RuiBo Center(T1)  
Lane683, Shenhong Rd,  
Minhang District,  
Shanghai, China, 201107  
Tel: +86 21 64203370  
[www.GRASacoustics.cn](http://www.GRASacoustics.cn)  
[cnsales@grasacoustics.com](mailto:cnsales@grasacoustics.com)



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at [www.grasacoustics.com](http://www.grasacoustics.com)

[grasacoustics.com](http://grasacoustics.com)

**GRAS**  
An Axiometrix Solutions Brand