

# GRAS 40PP-10

CCP Free-field QC Microphone



Freq range: 10 Hz to 20 kHz  
Dyn range: 33 dB(A) to 128 dB  
Sensitivity: 50 mV/Pa

The GRAS 40PP-10 Production-Line Test Microphone is a robust, cost-effective microphone designed for use in the production-line testing of loudspeakers and acoustic transducers. It has a wide frequency range reaching up to 20 kHz and a large dynamic range from <33 dB(A) to 128 dB.

## Typical applications and use

- Production-line testing of drivers, receivers, and microspeakers
- Sound-scape recording in array configurations
- Multichannel measurements (analysis)

## Design

The cost-effectiveness of the 40PP-10 is a key consideration when setting up multiple production lines. Close manufacturing tolerances provide the 40PP-10 with a high degree of interchangeability – a major advantage when used in production-line test setups.

The robust standard BNC connector of the 40PP-10 ensures an easy-to-handle setup and supports the use of standard RG58 cables all the way from the microphone to the input module.

The integrated CCP (Constant Current Power) preamplifier requires a constant-current power supply, such as the [GRAS 12AL](#) 1-Channel CCP Power Module with A-Weighting filter, or any other CCP compatible power supply or input module. The built-in TEDS (Transducer Electronic Data Sheet, according to IEEE 1451.4) chip provides information about the microphone that can be used by systems designed for use with TEDS.

## Microphone Calibration


Calibration is easy with a GRAS pistonphone, such as the [GRAS 42AA](#), together with a ¼" microphone adapter.

Before leaving the factory, GRAS products are tested and calibrated by GRAS, and an individual test certificate is included with the product.

GRAS Sound & Vibration continually strives to improve the quality of our products for our

customers; therefore, the specifications and accessories are subject to change.

Polarization/Connection		0 V / CCP
Frequency range ( $\pm 1.5$ dB)	Hz	50 to 5 k
Frequency range ( $\pm 2$ dB)	Hz	10 to 20 k
Dynamic range lower limit (microphone thermal noise)	dB(A)	<33
Dynamic range upper limit	dB	128
Set sensitivity @ 250 Hz ( $\pm 2$ dB)	mV/Pa	50
Power supply (Constant Current Power)	mA	2 to 20
Microphone venting		Front
Output impedance	$\Omega$	<50
Temperature range, operation	$^{\circ}\text{C} / ^{\circ}\text{F}$	-10 to 50 / 14 to 122
Temperature range, storage	$^{\circ}\text{C} / ^{\circ}\text{F}$	-20 to 60 / -4 to 140
Influence of axial vibration @1 m/s <sup>2</sup>	dB re 20 $\mu\text{Pa}$	55
TEDS UTID (IEEE 1451.4)		27 v. 1.0
Connector type		BNC
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Weight	g / oz	24 / 0.85

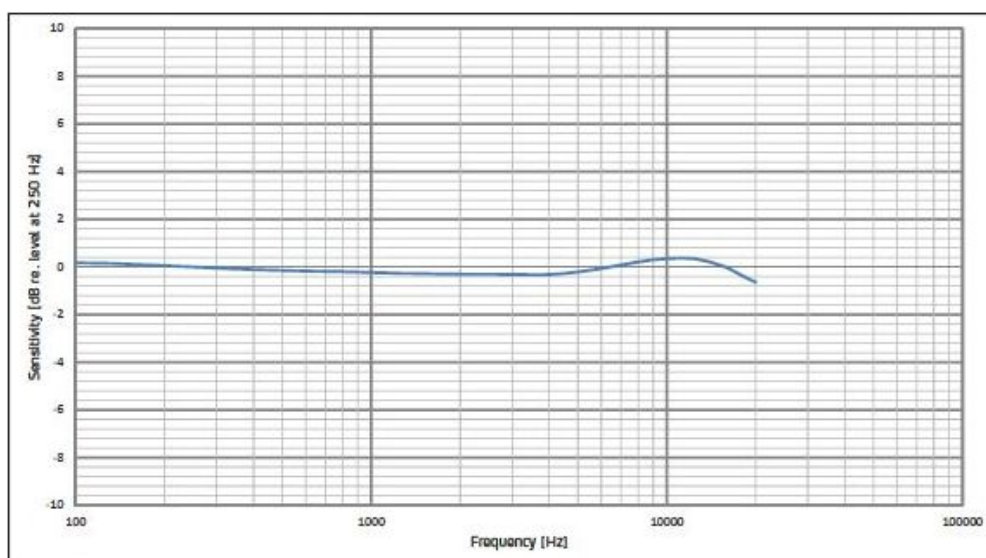


*Typical frequency response*

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.





Dimensions in mm

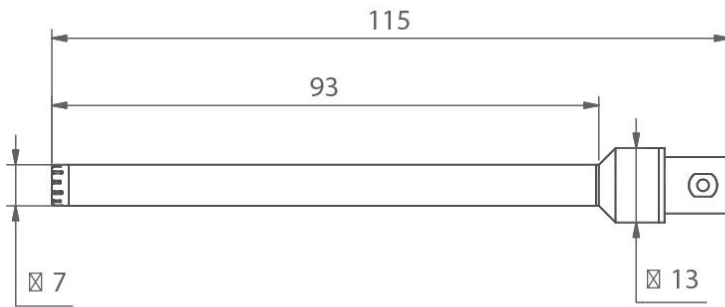

GS0528  
40PP



## Optional items

GRAS AA0039-CL	BNC to BNC 50 $\Omega$ extension cable, customized length
<a href="#">GRAS 12AL</a>	1-Channel CCP Power Module with A-weighting filter
<a href="#">GRAS AL0028</a>	Tripod adapter
<a href="#">GRAS RA0092</a>	Rain-protection Cap for array microphones
<a href="#">GRAS 42AP</a>	Intelligent Pistonphone, Class 0
<a href="#">GRAS 42AG</a>	Multifunction Sound Calibrator, Class 1

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.



# GRAS Worldwide

Subsidiaries and distributors in more  
than 40 countries

**HEAD OFFICE, DENMARK**  
**GRAS SOUND & VIBRATION**  
Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.grasacoustics.com](http://www.grasacoustics.com)  
[gras@grasacoustics.com](mailto:gras@grasacoustics.com)

**USA**  
**GRAS SOUND & VIBRATION**  
5750 S.W. Arctic Drive  
Beaverton, OR 97005  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.grasacoustics.com](http://www.grasacoustics.com)  
[sales-usa@grasacoustics.com](mailto:sales-usa@grasacoustics.com)

**UK**  
**GRAS SOUND & VIBRATION**  
Unit 115, Gibson House,  
Ermine Business Park, Huntingdon,  
Cambridgeshire, PE29 6XU  
Tel: +44 (0) 7762 584 202  
[www.grasacoustics.com](http://www.grasacoustics.com)  
[sales-uk@grasacoustics.com](mailto:sales-uk@grasacoustics.com)

**CHINA**  
**GRAS SOUND & VIBRATION**  
Room 303, Building T6  
Hongqiaohui, 990, Shenchang Road  
Minhang District, Shanghai  
China. 201106  
Tel: +86 21 64203370  
[www.grasacoustics.cn](http://www.grasacoustics.cn)  
[cnsales@grasacoustics.com](mailto:cnsales@grasacoustics.com)



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at [www.grasacoustics.com](http://www.grasacoustics.com)

[grasacoustics.com](http://grasacoustics.com)

**GRAS**  
An Axiometrix Solutions Brand