Quick Guide

G.R.A.S. OP0023 Kit for Sensitivity Calibration of Flush-mount Microphone Sets

Description

The G.R.A.S. OP0023 is a kit with adapters for sensitivity calibration of G.R.A.S. flush-mount microphone sets.

These adapters make it possible to calibrate the G.R.A.S 1/2", 1/4" and 1/8" Flush-mount microphone sets with a G.R.A.S. pistonphone. We recommend the G.R.A.S. 42AP Intelligent Pistonphone, Class 0 because of its built-in barometer and thermometer.

Delivered Items

The following items are part of the delivery:

| Pistonphone Calibration Adapter for 1/2" Flush-mount Microphone Sets | RA0221 |
|--|--------|
| Pistonphone Calibration Adapter for 1/4" Flush-mount Microphone Sets | RA0228 |
| Pistonphone Calibration Adapter for 1/8" Flush-mount Microphone Sets | RA0278 |

G.R.A.S. OP0023

Kit for Sensitivity Calibration of Flush-mount Microphone Sets

Mounting the Microphone Set in the Adapter


Push the microphone gently into the adapter as far as it will go. An O-ring inside the adapter ensures a tight seal and keeps the microphone in its proper location.

Mount the adapter in the pistonphone and calibrate according to the instructions in your pistonphone's manual. No correction factor should be applied.

47AD and 47AX 1/2" Flush-mount Microphone Sets



47BX 1/4" Flush-mount Microphone Set

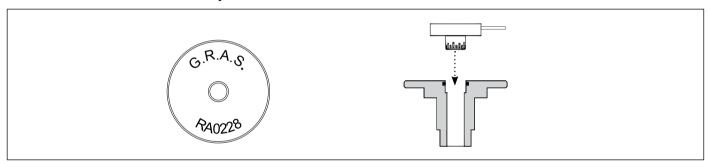

47DX 1/8" Flush-mount Microphone Set

