GRAS 12BC, 12BF AND 12BD LEMO POWER MODULES WITH TEDS SUPPORT 12BC, 12BF AND 12BD





Connection: LEMO Traditional 200 V Channel(s): 1, 2 or 4 TEDS via USB GRAS 12BC, 12BF and 12BD are 1-, 2- and 4-channel LEMO power modules, respectively. They have TEDS support and can be powered by USB or AC mains (included).



Technology

GRAS 12BC, 12BF and 12BD LEMO Power Modules with TEDS Support

The GRAS 12BC, 12BF and 12BD are, respectively, single-two- and four-channel USB-powered LEMO power modules with TEDS support.

These power modules provide power to microphone sets without signal degradation, gain modification, or attenuation.

This series excells as a simple and cost-effective interface between TEDS-enabled measurement microphones and any <u>Audio Precision APx series</u> analyzer, which will automatically extract TEDS data for seamless integration.

However, these power modules can also be used with other brands. In this case, a utility program provides access to TEDS data on a PC. This <u>utility</u> <u>program can be downloaded here</u>.

Power for 12BC, 12BF and 12BD is provided through a USB cable if the port can supply a minimum of 1.5 A that is required by the module. Power can be supplied via a USB 2.0 or USB 3.0 port connected to a USB-C port on the power module or AC mains power through the AUXPWR port if the minimum 1.5 A is not available through the USB-C port.

If more channels are needed, multiple power modules can be used concurrently.




GRAS 12BC, 12BF and 12BD LEMO Power Modules with TEDS Support

Frequency response (±0.06 dB) (with 100 k load)	Hz	10 to 20
Frequency response (±0.03 dB) (with 100 k load)	Hz	20 - 200k
Inherent noise, input shortet, 10 Hz - 20kHz	μVrms	2
Overload indication		No
Temperature operation	°C / F	0 to +45 / 32 to 1113
Temperature range, storage	°C / °F	-40 to +75 / -40 to 167
Humidity (non-condensing)	%	max. 90
Dimension including mounting ears (WxHxD)	mm / "	108 x 44.2 x 178.3 / 4.35 x 1.74 x 7.02
Channels, 12BC		1
Channels, 12BF		2
Channels, 12BD		4
Polarization voltage	V	200
Preamplifier Supply Voltage	Vdc	+/-15
Max input Voltage	Vp	14
USB		С
USB Power + 5 Vdc	А	1.5
External Power Supply +5 Vdc	А	1.5
External Power Connector		DC (5.5mm x 2.1 mm bar- rel)
Weight 12BC, 1 Ch	g / oz	390 / 13.8
Weight 12BF, 2 Ch	g / oz	425 / 15.0
Weight 12BD, 4 Ch	g / oz	494 / 17.4




Dimensions

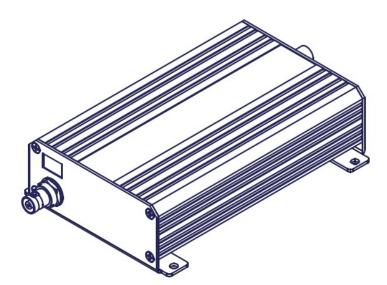





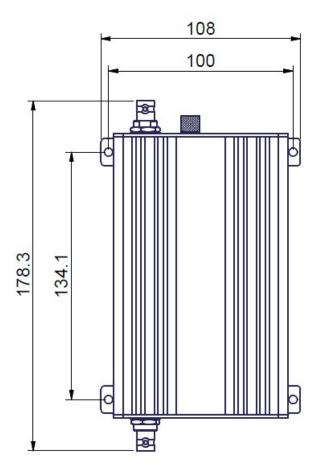



GRAS 12BC, 12BF and 12BD LEMO Power Modules with TEDS Support

GRAS 12BC	1-Channel LEMO Power Module with USB Connection
GRAS 12BF	2-Channel LEMO Power Module with USB Connection
GRAS 12BD	4-Channel LEMO Power Module with USB Connection

Included

- USB Cable

- AC mains power adapter

Optional

Extension cables with 7-pin LEMO connectors

GRAS AA0008	LEMO 7-pin-LEMO 7-pin cable, 3 m
GRAS AA0009	LEMO 7-pin-LEMO 7-pin cable, 10 m
GRAS AA0012	LEMO 7-pin-LEMO 7-pin cable, 30 m
GRAS AA0014	LEMO 7-pin-LEMO 7-pin cable, 100 m
GRAS AA0020-XX	Custom, XX specifies the length in metres

Extension cables with BNC connectors

GRAS AA0033	BNC-BNC cable, 1 meter
GRAS AA0034	BNC-BNC cable, 2 meters
GRAS AA0035	BNC-BNC cable, 3 meters



GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK

GRAS SOUND & VIBRATION

Skovlytoften 33 2840 Holte Denmark Tel: +45 4566 4046 www.GRASacoustics.com gras@grasacoustics.com

USA

GRAS SOUND & VIBRATION

9290 SW Nimbus Avenue Beaverton, OR 97008 Tel: 503-627-0832 Toll Free: 800-231-7350 www.GRASacoustics.com sales-usa@grasacoustics.com

UK

GRAS SOUND & VIBRATION

Unit 115, Gibson House, Ermine Business Park, Huntingdon, Cambridgeshire, PE29 6XU Tel: +44 (0) 7762 584 202 www.GRASacoustics.com sales-uk@grasacoustics.com

CHINA

GRAS SOUND & VIBRATION

Room 315, RuiBo Center(T1) Lane683, Shenhong Rd, Minhang District, Shanghai, China, 201107 Tel: +86 21 64203370 www.GRASacoustics.cn cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

GRAS

An Axiometrix Solutions Brand

grasacoustics.com